

OVERHEAD SECTIONAL DOOR OSP82A

Highly insulated and energy efficient

Temperature control

Built with 82 mm of insulation the new NORMSTAHL OSP82A is designed to give you excellent thermal separation and great energy savings. And with innovative features, such as tight top and side seals and a waterresistant bottom seal you can be confident that you will minimize drafts and condensation in your workplace. This overhead sectional door gives you control over your indoor environment so you can create optimum working conditions.

Our lowest U-value to date

Constructed to meet the most stringent environmental regulations, the engineering and features of the NORMSTAHL OSP82A exceed current requirements with an exceptionally low U-value of 0.46W/m²K.



Normstahl Overhead sectional door OSP82A

TECHNICAL DATA

Standard size up to (W x H) ¹	8000 x 6000 mm
Panel thickness	82 mm
Windows	optional
Passdoor	not possible
Access and Automation	optional
Wind load, EN 12424 ²	from class 2
Thermal transmittance, EN 12428 ³ Full panel steel door	0.46 W/(m ² K)
Water penetration, EN 12425	class 3
Air permeability, EN 12426	class 3

1) Other sizes on request, size limited by doorweight

2) Higher wind loadclassification on request

3) Door size 5000 x 5000 mm


MIX-N-MATCH

The NORMSTAHL OSP82A has the same high quality design options as the NORMSTAHL OSP42A and the NORMSTAHL OSP42S, so if you have more than one overhead door you can configure them to create a uniform façade.


YOUR CONFIGURATIONS

The new NORMSTAHL OSP82A can be configured to your precise specifications. You can choose to have windows, pick from 13 standard colors or request your own factory painted color and there are a wide range of track sets and dimensions so you can tailor the NORMSTAHL OSP82A to suit your entrance needs.


Dimensional specifications

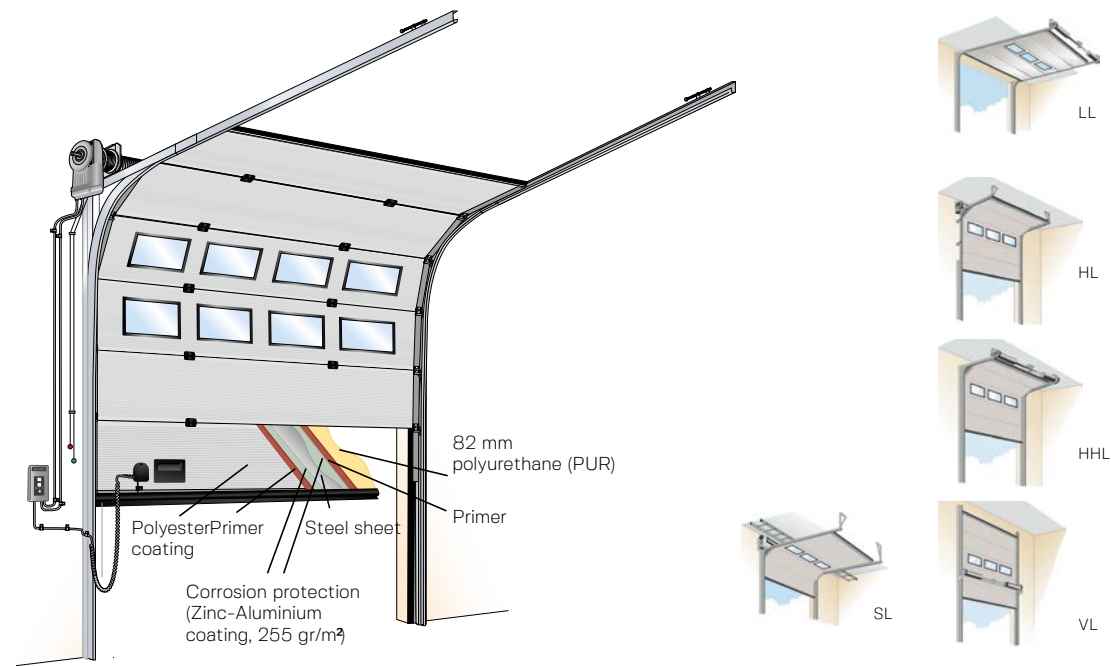

Panel options

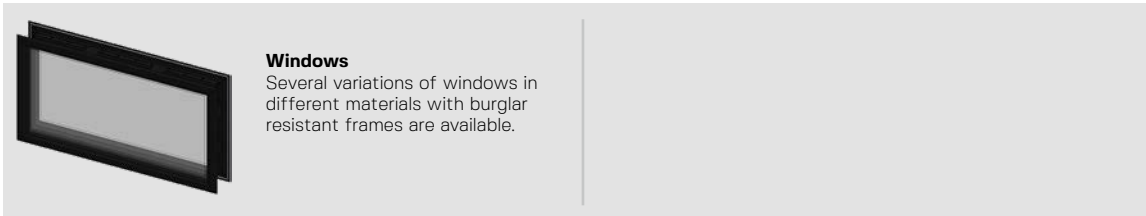

Options access and automation

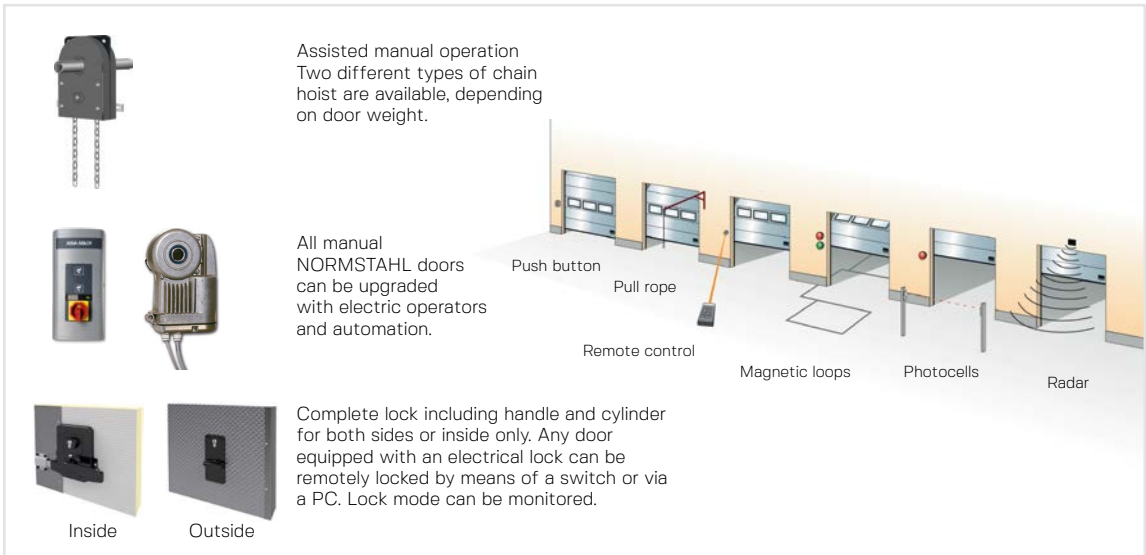

Standard available outside colours

