

Normstahl

My Door.

NORMSTAHL ROLLER DOORS



NORMSTAHL ROLLER DOORS



Roller door internal running | Oval window profiles | Silver 91 (sim. to RAL 9006)

THE SPACE MIRACLE

Special situations require special solutions. Our roller shutter door programme covers precisely these requirements and offers a range of options. You can choose the right combination for your needs from 3 different slat models and 16 standard colours. This allows you to put together your own personalised roller shutter door to suit your requirements.

Our roller shutters are lifted by powerful electric motors as standard. You can operate them easily and conveniently using a hand-held transmitter.

Highlights



MAINTENANCE-FREE OPERATION

Normstahl aluminium roller shutters do not rust, do not require further painting and will run for a lifetime if operated correctly. The weather-resistant slat box ensures long durability and optimum storage.



OBSTACLE-DETECTING EMERGENCY STOP

You never know: children playing in the door area, unintentional operation... If the worst comes to the worst, the emergency stop stops the door as soon as it encounters an obstacle.



TESTED SAFETY

All doors have complied with the new DIN-EN safety standards for years.

Why Rollerdoor?


- Optimum space-utilisation in and in front of the garage
- No threshold - easy to enter and drive into the garage
- Plug-in push-button control incl. safety contact strip
- Clean system - a closed aluminium cover box protects the door slats.

Technology

- maximum width 5,250 mm
- Maximum height: 4,500 mm
- Burglar-resistant thanks to standard anti-lift device.
- Security of use guaranteed even in the event of a power failure thanks to standard emergency hand crank
- 2 model variants, 16 standard colours, 4 slat profiles

Models

In addition to the standard profile (AHS 75), ventilation or viewing window profiles can also be harmoniously integrated into the door as required. The aluminium slats are not only available as a standard profile with a cover width of 75 mm, but also with 55 mm. (Ventilation profile only available for inside right-hand roller shutters).



AHS 75


Standard profile for AHS 75



Ventilation profile for AHS 75 only for right-hand roller inside



Window profile for AHS 75



AHS 55

Roller door profile for AHS 55

Door leaf surface coating



Model	White 21 sim. to RAL 9016	Silver 91 sim. to RAL 9006	Gray 90 sim. to RAL 7038	Gray aluminium sim. to RAL 9007	Gray metallic sim. to DB703	Umbra gray sim. to RAL 7022	Anthraccite gray sim. to RAL 7016	Black gray sim. to RAL 7021	Jet black sim. to RAL 9005	Beige 31 sim. to RAL 1001	Ivory 71 sim. to RAL 1015	Golden Oak 69* sim. to Light oak decor 060	Boen 62* sim. to RAL 8014	Jamaika brown 66 sim. to RAL 8017	Moss green sim. to RAL 6005	Purple red sim. to RAL 3004
Roller door AHS 55	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Roller door AHS 75	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Runners / box colour:

Standard in door colour, except for roller shutter doors* = different colour, i.e. only available as curtain colour and bottom slat is slightly different!



Installation

RIGHT-HAND ROLLER INSTALLATION INSIDE BEHIND THE REVEAL

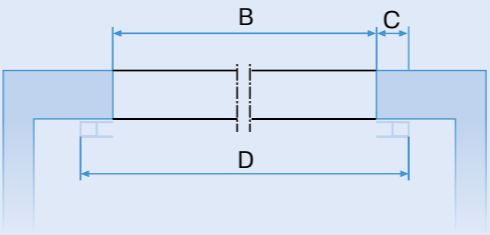

- B = clear width/order size
- H = clear height/order size
- C = frame dimension (75-103mm: model & depending on door size)
- D = outer frame dimension width
- E = External frame height
- F = Clearance height
- S = Box height / lintel (255 - 400mm: Model & door size dependent)
- T = Box depth

LEFT-HAND ROLLER INSTALLATION OUTSIDE IN FRONT OF THE REVEAL

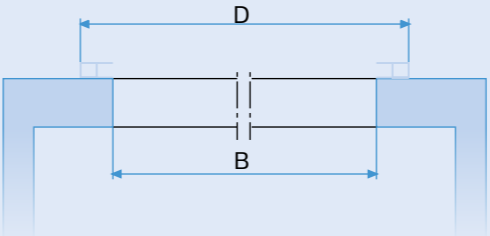

ATTENTION!:
Dimensions are based on door sizes. Ask your specialist partner for more detailed information.

Normstahl

My Door.



© ASSA ABLOY

Internal roller shutter | Slat with ventilation profile | White aluminium (sim. to RAL 9006)



Subject to change without notice.
Colour deviations due to printing
technology are possible.

Part of ASSA ABLOY



www.normstahl.com