

OVERHEAD SECTIONAL DOOR OSP42A

The next generation of overhead sectional doors

Modern, robust and flexible, the new NORMSTAHL OSP42A from NORMSTAHL Entrance Systems is designed to keep your business moving – for all duties and in all weathers. Filled with innovation, and superbly well insulated, this rugged, attractive overhead sectional door gives you the highest number of options at the lowest possible running cost. This high quality door is the perfect choice for warehouses, logistics centers and all kinds of business premises.

Each part of the NORMSTAHL OSP42A overhead sectional door is built to the highest standards. The combination of wind-resistant reinforced panels and a class 3 certification for water tightness, wind load and air permeability give you a door that looks better and performs longer. Small innovations that make a big difference to the buildings they protect.

Choosing from 13 standard outdoor colours, or your own factory painted colour for both the inside and outside. Available with different sizes, panels, window configurations, locks, handles and pass doors, the NORMSTAHL OSP42A overhead sectional door is perfectly suited to every kind of industrial need.



Normstahl Overhead sectional door OSP42A

TECHNICAL DATA

Standard size up to (W x H) ¹	8,000 x 6,000 mm
Panel thickness	42 mm
Windows	optional
Pass door	optional
Access and Automation	optional
Wind load, EN 12424 ²	class 2
Thermal transmittance, EN 12428 ³ Full panel steel door Full panel aluminium door	1,0 W/(m²K) 1,1 W/(m²K)
Water penetration, EN 12425 ⁴	class 3
Air permeability, EN 12426 ⁴	class 3

- 1) Other sizes on request
- 2) Without pass door. Higher wind load classification on request
- 3) Door size 5,000 x 5,000 mm
- 4) Without pass door

GI AZING

Glazing alternatives vary from full-vision panels to individual windows in a rectangular or oval shape. The windows are available in acrylic or hardened glass.


PASS DOOR OPTION

The pass door (standard or low threshold) is 900 mm wide, satisfying today's market demands. The pass door has improved insulation through thermal seperated profiles and double seals. The double seals also minimize air/water permeability. The pass door is designed with a sturdy, wide aluminum profile of only 16 mm. The profile gives an unobstructed passage and is ribbed, minimizing the risk of slipping.

STANDARD COLOURS

The steel NORMSTAHL OSP42A overhead sectional door is available in 13 pre-coated outside colours. The inside colour is RAL 9002, Grey white. The aluminium NORMSTAHL OSP42A is available in 3 pre-coated outside colours with natural aluminium inside.

Dimensional specifications

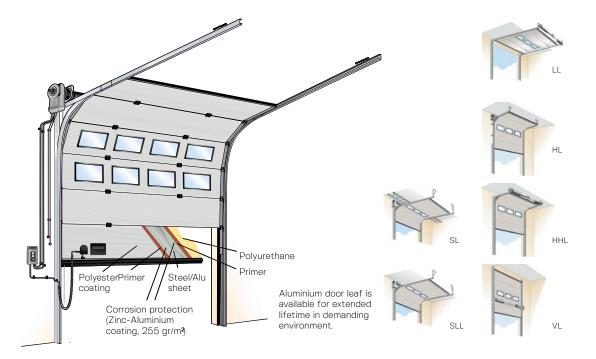

Panel options



Standard pass door with 180 mm threshold

This pass door is constructed with the standard bottom section and bottom seal. A reinforcement truss ensures the door's sturdiness and resistance to wind load.



Low threshold pass door

The 900 mm wide low threshold pass door isdesigned with a sturdy and wide aluminium bottom profile of only 16 mm high.



Full vision panels with windows


Several different types of windows in single or double acrylic (frosted or tinted) or hardened glass are available.



Windows

Several variations of windows in different materials with burglar resistant frames are available.

Options access and automation

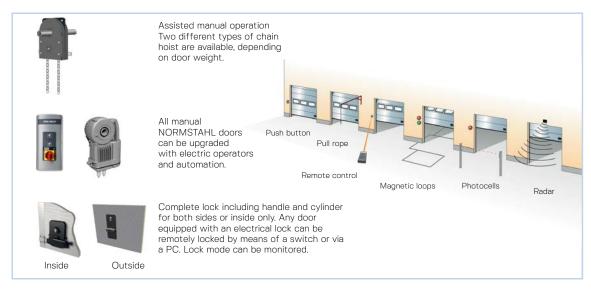

Standard available outside colours



