

## OVERHEAD SECTIONAL DOOR ID40P

### The core performance solution

Not every industrial application calls for complexity. Sometimes the best solution is the one that simply works.

That's exactly what the Normstahl ID40P delivers: a reliable entrance door in our overhead sectional range, built to provide businesses that value clarity and core performance with essential functionality.

Designed for flexibility, it fits seamlessly into a wide variety of settings — from manufacturing and warehousing to distribution and logistics.

By combining everyday dependability with strong energy efficiency and long-term durability, the Normstahl ID40P helps create safer, more cost-effective working environments wherever it's installed. The ID40P comes with a longlasting **brushless** drive system.

This is an overhead sectional door that gives you everything you need – and nothing you don't.



Normstahl overhead sectional door ID40P

### TECHNICAL DATA

Standard size up to (W x H) <sup>1)</sup>	6,000 x 6,000 mm
Panel thickness	40 mm
Windows	Rectangular or oval acrylic windows 2+3mm
Pass door	not available
Access and Automation	Pull down rope, Servox operator, Automated operation, Access control, Safety functions
Wind load, EN 12424 Class 3	4,000 x 3,000 mm
Thermal transmittance, EN 12428	1,1 W/m <sup>2</sup> K
Water penetration, EN 12425	Class 3
Air permeability, EN 12426	Class 3
Performance Test	100,000 cycles

1) Other sizes on request

### Energy efficiency

- 40mm insulated steel panels without thermal bridges
- High-quality sealing at top, bottom and sides helps reduce energy loss
- U-Value: 1,1 W/m<sup>2</sup>K (4,000 x 3,000 mm)

### Match your door to your building

- A selection of five standard RAL color choices
- Optional factory painting in almost any RAL or NCS color
- Invite light and visibility with a range of window options

### Control access simply and safely

- Manual, semi-automatic or fully automated operation available
- Motorized system with smooth 0.25 m/s opening speed
- Convenient remote control and access options to suit site needs
- Built-in safety features and secure locking for greater peace of mind



### Keep operations running smoothly

- Class 3 performance in wind load and water resistance, as well as air permeability
- Reliable thermal performance and acoustic insulation
- Lifetime expectations tested up to minimum 100,000 door cycles
- Fully compliant with European standards for safety and reliability

### Fit your door to any layout

- Four lift types: standard, low, high or vertical for maximum flexibility
- Flexible installation makes it suitable for a wide range of facilities

## Dimensional specifications

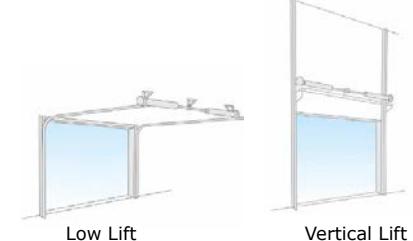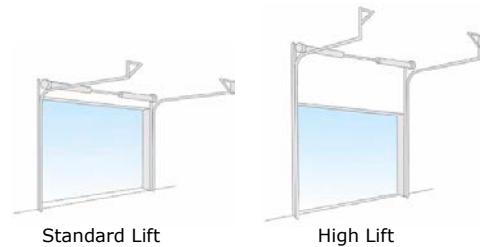

## Panel options



### Windows

Several variations of windows in different materials with burglar resistant frames are available.



### Ventilator

Optional ventilator in the bottom section.

## Options access and automation



To open or close the door in case of poweroutage, an integrated chain hoist can be activated to operate by chain.



The ID40P is supplied with the **brushless** Servox operating system.



The ID40P is available with a lockbolt or a cylinder lock.



### Push Button



### Pull Rope



### Remote Control



### Magnetic Loop



### Photocell



### Radar



### Reduced Opening



### Traffic Light



### Interlocking



### Automatic Closing



### Acoustic

## Standard available outside colours



Grey white  
RAL 9002



White Aluminium  
RAL 9006



Anthracite grey  
RAL 7016




Jet black  
RAL 9005




On  
request



Other  
colours



Part of ASSA ABLOY



[www.normstahl.com](http://www.normstahl.com)